

SCHMIDT® SIGMAWIG ALL WELDED PLATE HEAT EXCHANGERS



SIGMAWIG – opens up new fields of application

SIGMA plate heat exchangers are recognized world-wide for quality and reliability in thermal processes such as cooling, heating, pasteurising, evaporation and condensation. To meet the increasing requirements for plate heat exchangers in special applications, a new type of plate heat exchangers without gaskets called SIGMA**WIG** was developed particularly for:

- Chemical industry
- Pharmaceutical industry
- Industrial cooling
- Heat balancing systems

The SIGMA**WIG** construction makes it possible to noticeably extend the application of plate heat exchangers in respect of new media, temperatures and operating pressures. Especially media with aggressive or environmentally dangerous potential can be controlled with this new gasket-free plate heat exchanger design.

TIG welding seams without filler eliminate the risks of leakage and diffusion. That is why more and more SIGMA**WIG** are used, where operational dependability is indispensable:

- Control of chemical reaction processes
- Temperature equalization of intermediate and final products
- Cooling, heating or condensation of solvents
- Cooling and heating of DEMI-water
- Heat recovery in chemical or refining processes
- Evaporation / condensation of refrigerants

SIGMA**WIG** in standard design can be applied for operating pressures of up to 25 bar and operating temperatures of up to 250 °C.

Special design for higher pressures and temperatures and in special alloys are available.



SIGMA**WIG** ST12 in a heating-cooling circuit for tempering of chemical reactor




SIGMA**WIG** ST30 for steam condensation

SIGMAWIG – one application out of a vast multitude



More than 10.000 SIGMAWIG prove under tough process conditions

SIGMAWIG – main connection types




STANDARD FLANGED CONNECTION

Availability of a variety of flanges—ranging from standards such as EN 1092 to ASME 16.5 as well as a number of other standards upon request.



FLANGED CONNECTION WITH INTERNAL EXPANSION JOINTS

A construction for applications with frequent temperature changes that is proven in more than 1,000 installations.



STUDED PORT WITH O-RING SEALING BETWEEN PLATE PACK AND PRESSURE FRAME

The advantages of this connection type are not only in its cost efficiency but also in the possibility to change or extend the plate pack on site. Especially where nonstandard plate materials are required, this construction offers an economical solution while allowing higher nozzle loads and higher temperature changes.

SIGMAWIG – the optimal choice for critical process parameters

Advantages	By Competence
Weldings replace gaskets	Higher security level at critical process conditions
Temperatures ≥ 250 °c	e.g., Steam, thermal oil edible oil
Operating pressures ≥ 25 bar	e.g., Condensation of refrigerants high pressure heating or low temperature networks
Compact design	Minimum space required, minimum installation, minimum piping
Efficient heat transfer	Homogeneous countercurrent flow
Small liquid content	Optimized control of process, higher level of security, when handling dangerous products
10,000 Times proven	Proven design, long-term experience in practice in a wide field of applications



SIGMAWIG ST40 tempering of chemical reactor / Bayer Chemicals, Leverkusen



SIGMAWIG ST12 tempering of chemical reactor thermo-oil / ethylenglycol



Compact reactor heating-cooling module

SIGMAWIG – the all welded plate heat exchanger

Technical details

SIGMAWIG all welded plate heat exchangers are similar to gasketed plate heat exchangers because of the number of corrugated plates and do not include gaskets. The plates are sealed hermetically by TIG welded seams. The loading capacity of these connection exceeds the strength of gaskets.

The fishbone geometry of the flow channels built by the plates effects high turbulences on the fluids, which result in optimum heat transfer. The countercurrent flow arrangement allows most efficient heat transfer.



The welded plate pack is clamped into a pressure frame. Standard connections are flanges and threads.

For the standard product line, all parts in contact with the product are made of stainless steel and free of nonferrous metal.

Special alloys are possible, too.



Cross section of plate pack

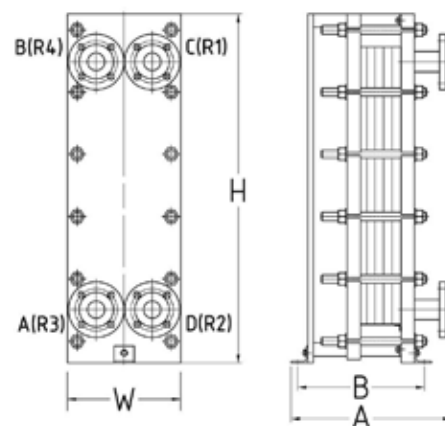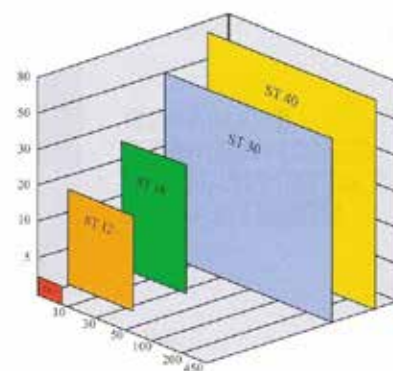

Main dimensions SIGMAWIG

	Nozzle Size	Max.	Min. Operating Temperature *)	Min. Operating Temperature *)	Max. Flow Rate (Liquid)	Max. Exchange Surface	Max. Length A	Max. Length B	Width W	Height H
Units	[DN]	[bar]	[°C]	[°C]	[m³/h]	[m²]	[mm]	[mm]	[mm]	[mm]
ST 3	25	25	250	-120	8,5	2,7	600	325	108	303
ST 12	50	25	250	-120	35	16,5	686	576	335	790
ST 18	50	25	250	-120	35	25	686	576	335	1035
ST 30	100/150	25	250	-120	450	60	1385	935	550	1180
ST 40	100/150	25	250	-120	450	90	1385	935	550	1480

*) variations on request

A world of heat transfer solutions

API Heat Transfer's global presence includes manufacturing facilities, R&D locations, and sales support throughout the world, all focused on one goal—to better serve our customers.



For more information about our heat transfer products, contact our API Heat Transfer sales representative or visit apiheattransfer.com or apiheattransfer.de

Germany

API Schmidt-Bretten GmbH & Co. KG

Langenmorgen 4
75015 Bretten
Germany

+49 7252 530

USA

API Heat Transfer Inc.

2777 Walden Avenue
Buffalo, NY, 14225
USA

+1 716 684 6700

China

API Heat Transfer

156 Qingqiu Street, 3rd District
Suzhou Industrial Park
Suzhou, Jiangsu 215126
China

+86 512 8816 8000

GLOBAL HEADQUARTERS

2777 Walden Avenue | Buffalo, NY 14225 USA | +1.716.684.6700 | sales@apiheattransfer.com