





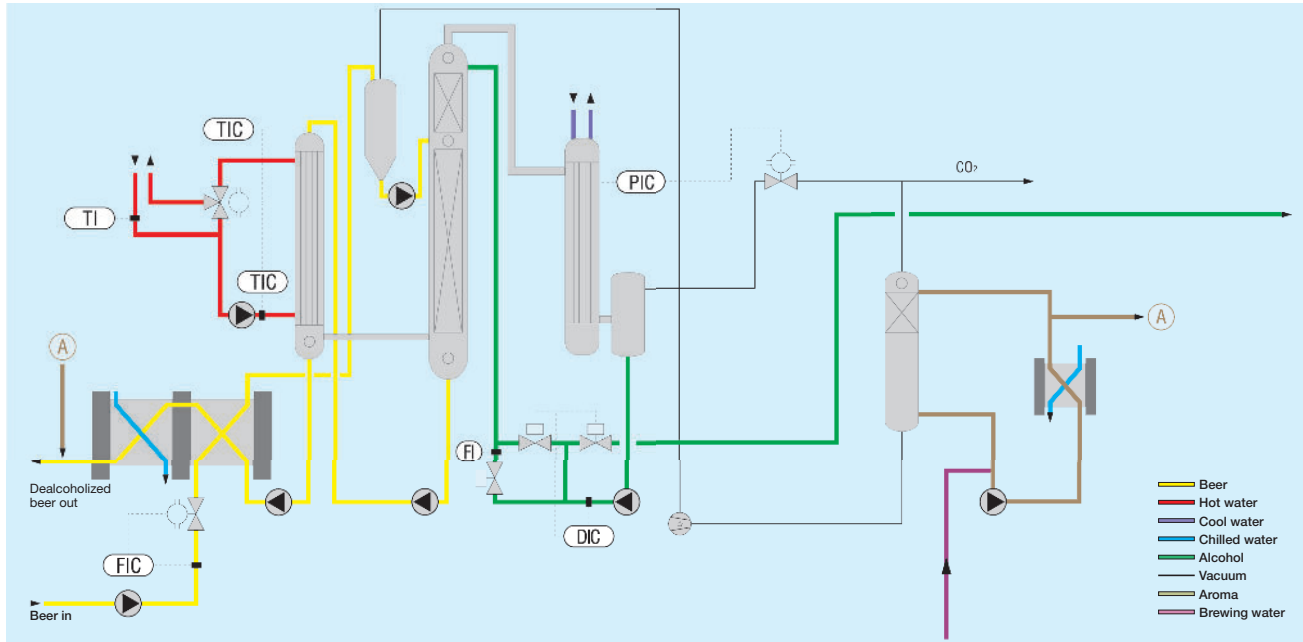
AN API HEAT TRANSFER COMPANY 

# FULL TASTE ZERO ALCOHOL

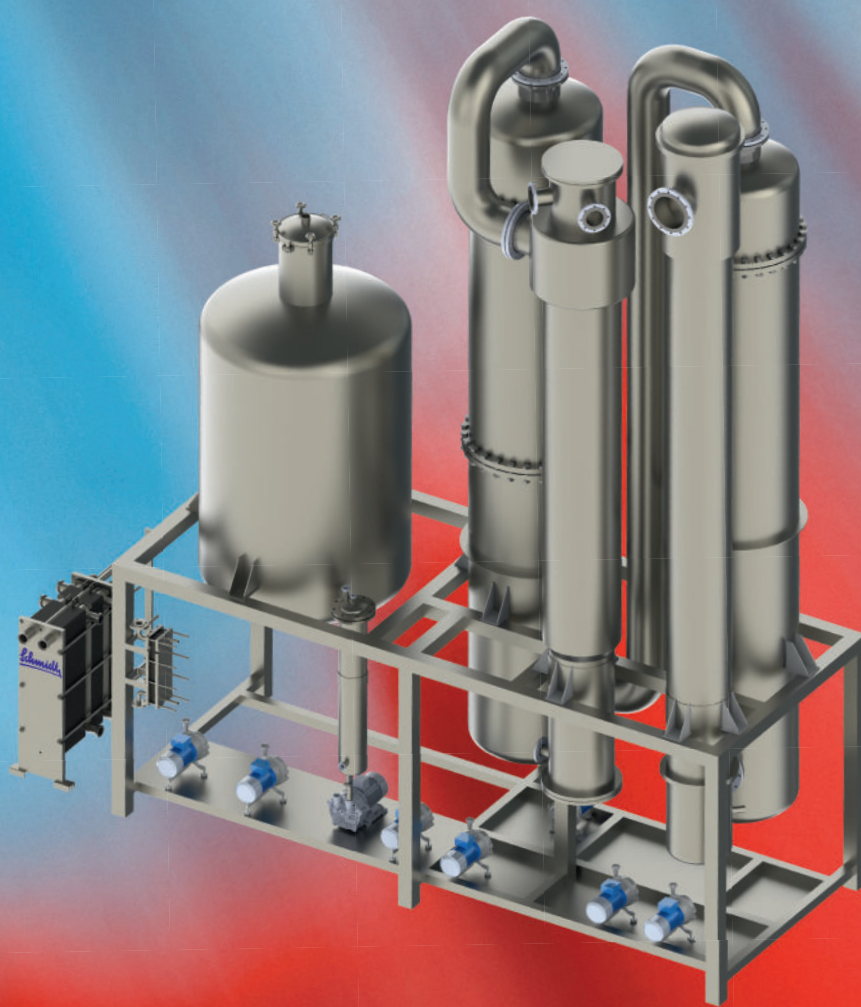

 System Solutions  
For Dealcoholization

# Technology



Process Diagram for SIGMATEC Dealcoholization Plant

## Description of Technical Procedure

With SIGMATEC technology it is possible to dealcoholize a diverse range of alcoholic products. The process varies according to the nature of the given product and is based on the following criteria:

### ■ Preheating

Using a Schmidt plate heat exchanger the medium is preheated to the required degassing temperature.

### ■ Decarbonization

Depending on the final product, decarbonization takes place in a special vessel for the degassing procedure which enables mobile aromatic components to be recovered in the vacuum system.

### ■ Vacuum Rectification

A high-capacity distillation column carefully removes the alcohol from the product.

### ■ Flash Evaporation

From the already dealcoholized product a portion is evaporated in order to create the necessary stripping steam for the distillation tower.

### ■ Cooling

The medium is then cooled down by a Schmidt plate heat exchanger to approximately 2°C.

### ■ Carbonization

On request it is possible to inject the product with CO<sub>2</sub>.

### ■ Aroma Dosing

The aroma covered by an optional aroma recovery unit can be returned into the product. (Alternatively the product can be blended with the base product.)

## Areas of Application

With more than 30 years experience in dealcoholization, the Schmidt® SIGMATEC has become the market leader worldwide. The experience gained in supplying a large number of dealcoholizing plants, our SIGMATEC design has become highly refined.

To date, SIGMATEC systems have been manufactured for a scope of capacity ranging from 2 hl/h to 150 hl/h.

### Breweries

Wheat beer, Pils, Pale Ale, Lager, Dunkel, Stout

### Wineries

White/Red Wine, Sparkling Wine, Mulled Wine

### Fruit/Cider Production

Perry, Cider

### Other Industries

Alcoholic Liquids, Extracts



## Advantages of the Procedure

- Dealcoholization under 0.05 vol-%
- Cost-Effectiveness
  - minimum volume loss
  - alcohol concentration to 75 - 80 vol-%, hence a valuable, marketable byproduct
  - fully automatic operation
  - low energy consumption
  - low maintenance cost
- Careful Handling of Product
  - low processing temperature
  - short holding time
- Environmentally Beneficial and Advantageous in the Conservation of Resources
- Optional Aroma Recovery
- Optional Dosing of Base Product
- Optional CIP System
- Optional Desulfurization of Grape Juice

## Technical Versions


### MATERIALS AND SPECIFICATIONS

Materials of Columns and Tanks:	All Current Stainless Steels
Column Internals:	Metal Packings, Filling Material, Trays
Column Diameters:	Dn 200 to Dn 2,000
Heating System:	Direct Steam or Hot Water


### CAPACITY DATA

Feed Capacity:	2 hl/h - 150 hl/h (Beer)
Steam Consumption: Cooling Capacity:	15 - 18 Kg/hl 10 - 12 Kw/h
Average Temperature:	40 - 80°C
Alcohol Concentration at Inlet: Final Concentration of Alcohol:	0.75 - 15 Vol-% 40 - 85 Vol-%


# Application Examples

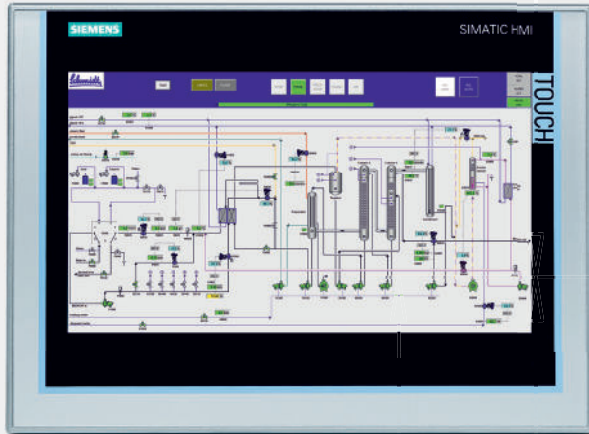

Visualization of the plant on the operator panel

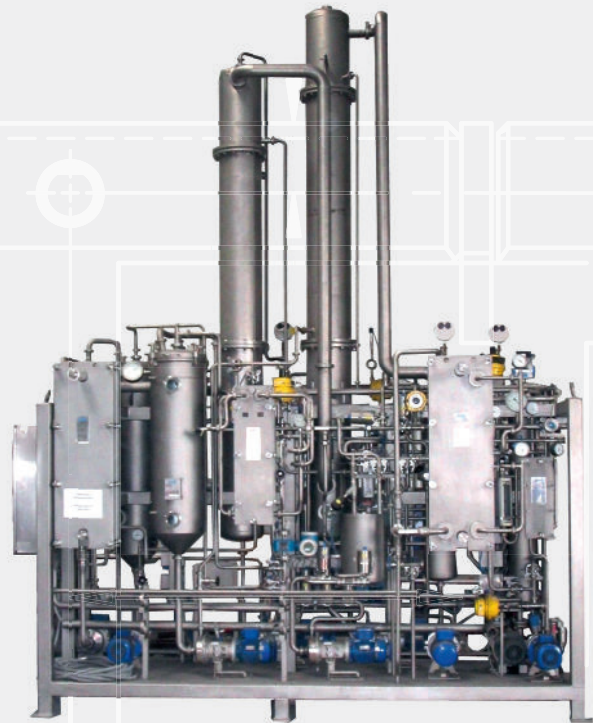

Mobile Testing Unit 4 hl/h - diverse products

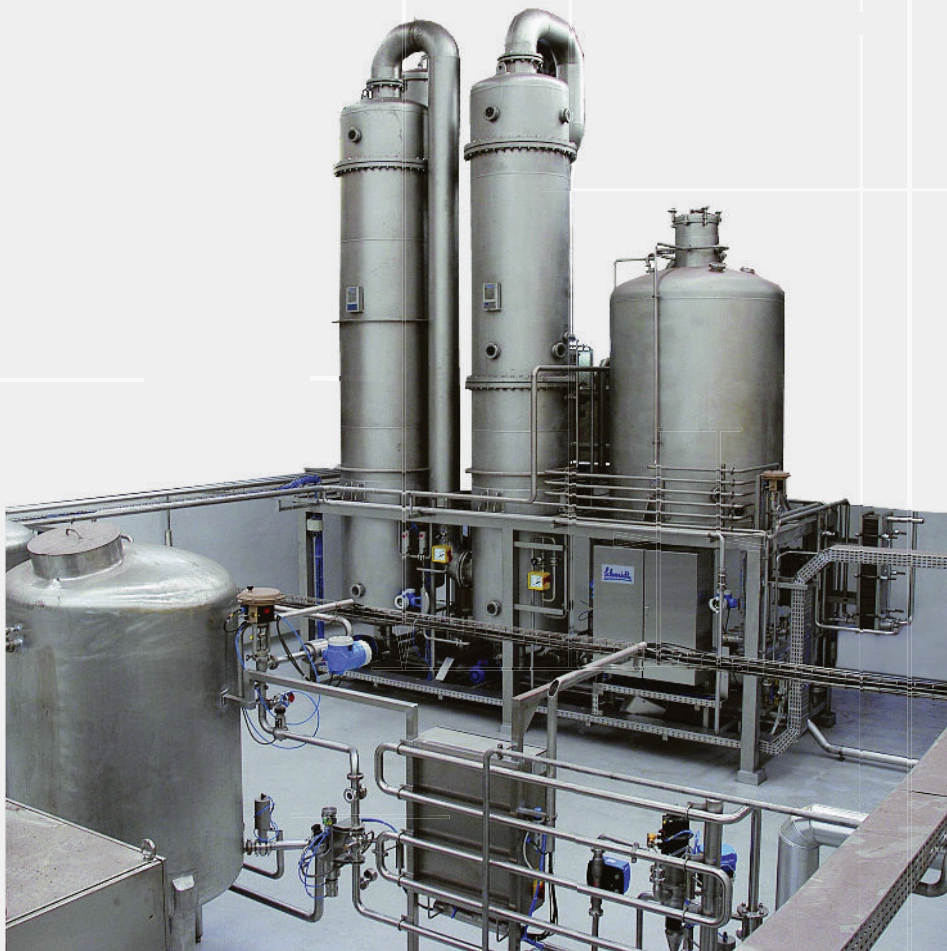

Dealcoholization plant for beer - 50 hl/h



Dealcoholization plant for wine - 2,000 l/h



Dealcoholization plant for beer - 100 hl/h beer - preassembled in the workshop



API Heat Transfer, a family of high-performance brands

## High-performance heat transfer.

It's who we are and what we do. It's part of our 140-year heritage designing and delivering world-class heat transfer products for nearly every industry. It's bolstered by our worldwide network of manufacturing facilities that provide sales, service, and support. And it's ingrained in a process that has helped customers around the world for nearly a century and a half.

When you work with us, you'll find the performance of our technologies sets the bar for heat transfer products, and our relentless drive to find and create custom heat transfer solutions to meet any industry challenge sets us apart.



For more information about our heat transfer products, contact our API Heat Transfer sales representative or visit [apiheattransfer.com](http://apiheattransfer.com) or [apiheattransfer.de](http://apiheattransfer.de)

### GERMANY

**API Schmidt-Bretten GmbH & Co. KG**  
Langenmorgen 4  
75015 Bretten  
Germany  
+49 7252 530

### USA

**API Heat Transfer Inc.**  
2777 Walden Avenue  
Buffalo, NY, 14225  
USA  
+1 716 684 6700

### CHINA

**API Heat Transfer Co., Ltd.**  
Meiheng Building  
369 Wuzhong Road  
Minhang District  
Shanghai 201 103  
+86 5426 2525

### GLOBAL HEADQUARTERS

2777 Walden Avenue | Buffalo, NY 14225 USA | +1.716.684.6700 | [sales@apiheattransfer.com](mailto:sales@apiheattransfer.com)

